



syncro®

The Ultimate Sliding PVC-U Patio Door

NEW SLIDING PATIO DOORS




Introducing a new in-line system with even more benefits built in

We're always looking to improve our products. So to keep in pace with customer demand, while staying in step with building regulations, the brand new Syncro system is here. Building on our unrivalled experience, Syncro isn't just our strongest and most secure patio door yet. It also offers better sustainability, design and performance – for you and your customers.



Market Leading Patio Door




Close to perfection in the patio door market

The launch of Syncro is another demonstration of how our commitment to research and development keeps our products in sync with the demands of designers, fabricators, installers and homeowners across the board.

But that's just for starters. What makes Syncro really stand out are these brand new features that help it make a really impressive entrance on the marketplace:

- Triple as well as double glazing compatible for even better insulation.
- Better thermal efficiency with U-values as low as 1.3 for double glazed units and 1.0 for triple glazed.
- Maximum width of 3.5m (2 pane)
- Grey substrate for total coordination with modern designs

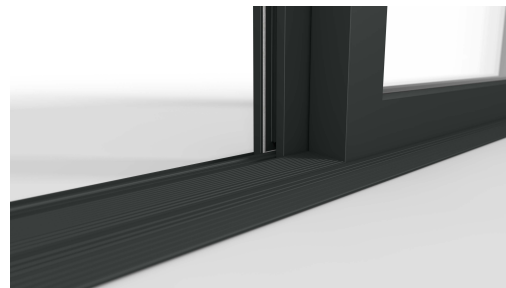

Security, strength and performance with style



Syncro is available to PAS24 standards, which means you can meet Document Q - the newest security regulations for patio doors. Plus, its improved strength, security and weather performance mean it also satisfies BS6375 as standard.



Features and benefits



Finish options



Colours that match your plans

Syncro is normally manufactured with a white internal finish to maintain a bright, fresh interior, but some colours are available on both sides from stock. Syncro doors are also available with a grey substrate for the look that's so much in demand at the moment.

Up to 10-year guarantee

Syncro patio door profiles are guaranteed for ten years. Which means you and your customers enjoy all the reassurance of a robust, well-designed, precision-made product that's built to last.

Profile colours


WHITE White interior	GOLDEN OAK White interior	GOLDEN OAK Both sides	ROSEWOOD White interior	ROSEWOOD Both sides	ANTHRACITE GREY White interior	ANTHRACITE GREY Grey base

Handle options and colours


Standard P Handle	White*	Antique Black	Hardex Gold
Slimline with Cup*	Hardex Chrome*	Hardex Graphite*	

*Available in selected colours

Configurations




2 Pane

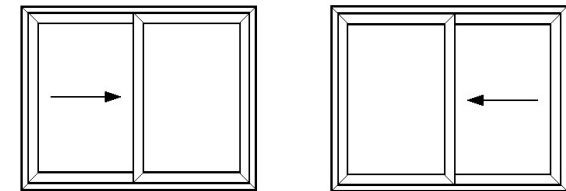


Suitable for openings ranging of up to a maximum 5930mm (four pane) Syncro Sliding Doors are flexible enough to accommodate almost any project.

3 Pane Centre Sliding

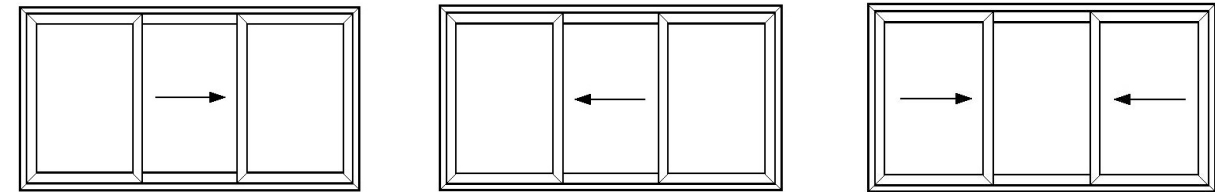

4 Pane

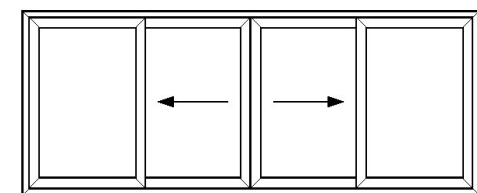

Full Frame Doors

		WIDTH	HEIGHT
2 PANE	MAX	3500mm* *3201mm - 3500mm maximum height 2100mm	2455mm*
	MIN	1650mm	1950mm*
3 PANE	MAX	5000mm* *4701mm - 5000mm maximum height 2100mm	2455mm*
	MIN	2480mm	1950mm
4 PANE	MAX	5930mm	2455mm
	MIN	3220mm	1950mm



Doors with Low Threshold

		WIDTH	HEIGHT
2 PANE	MAX	3500mm* *3201mm - 3500mm maximum height 2100mm	2400mm*
	MIN	1650mm	1950mm
3 PANE	MAX	5000mm* *4701mm - 5000mm maximum height 2100mm	2400mm*
	MIN	2480mm	1950mm
4 PANE	MAX	5930mm	2400mm
	MIN	3220mm	1950mm



Technical information

Cross sections

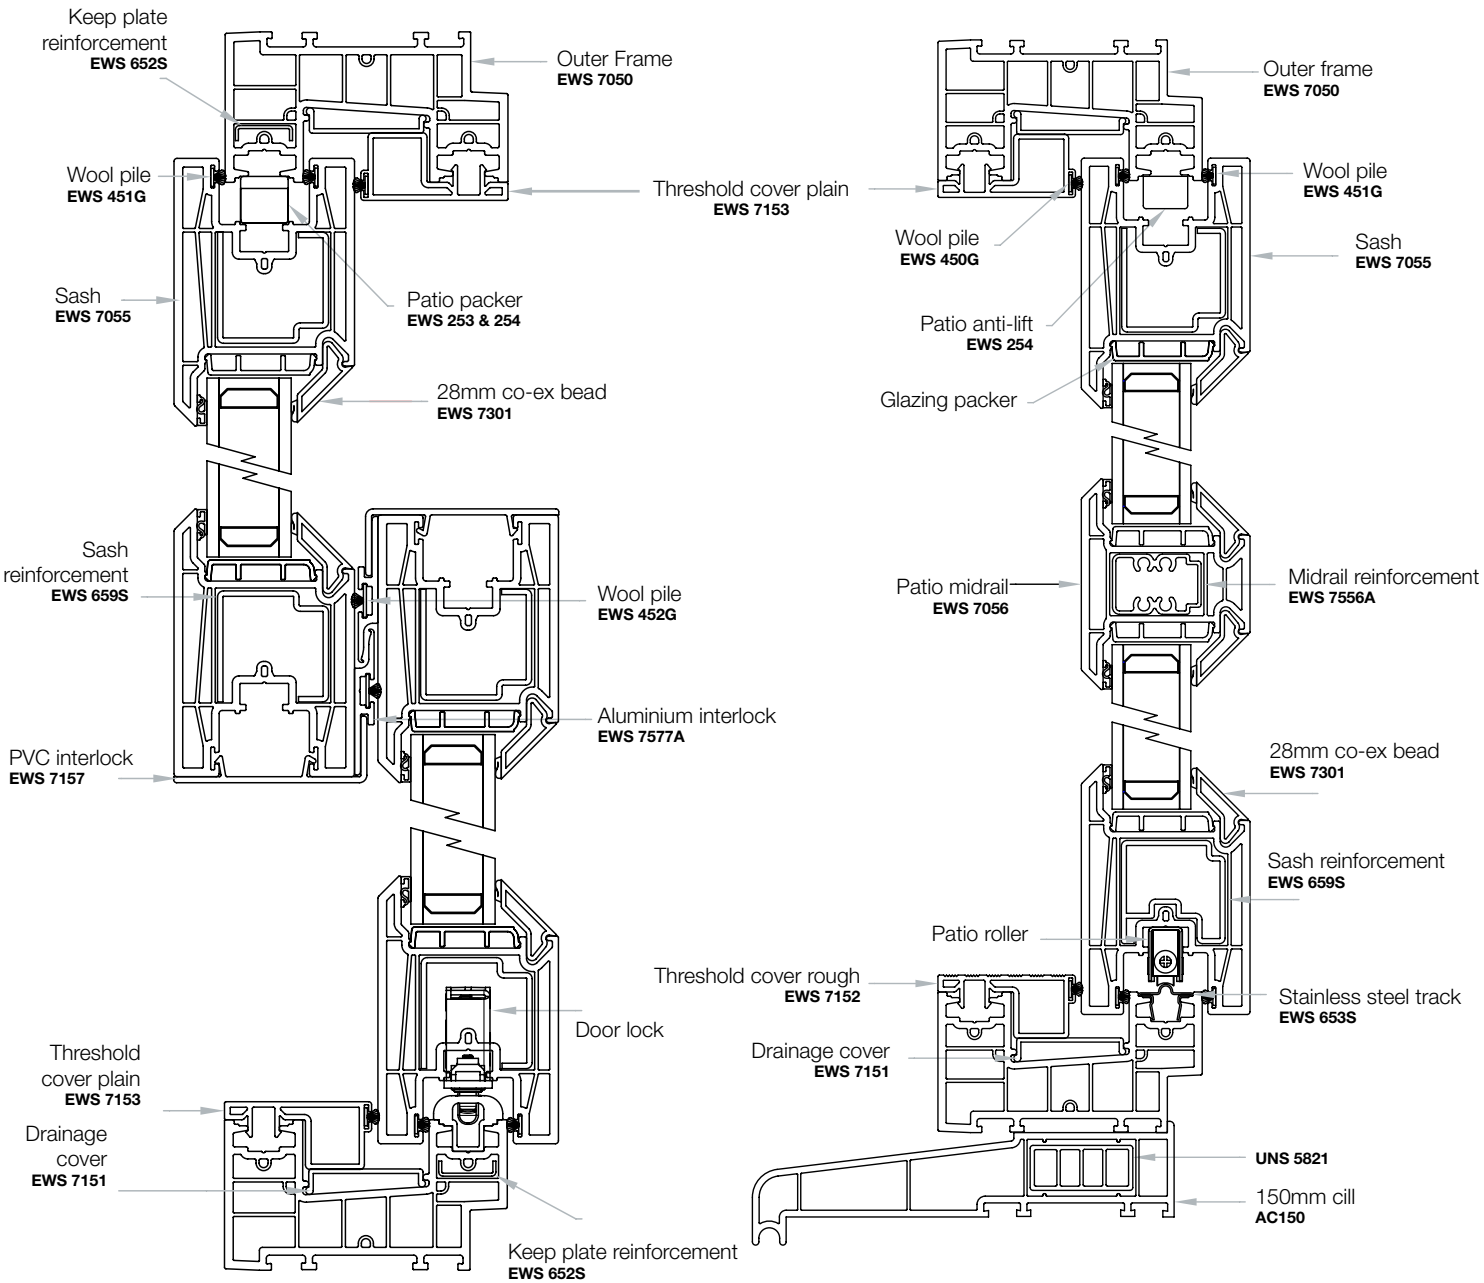



HORIZONTAL CROSS SECTION FOR 2 PANE STYLE

VERTICAL CROSS SECTION THROUGH SLIDING SASH

Technical information



Cross sections

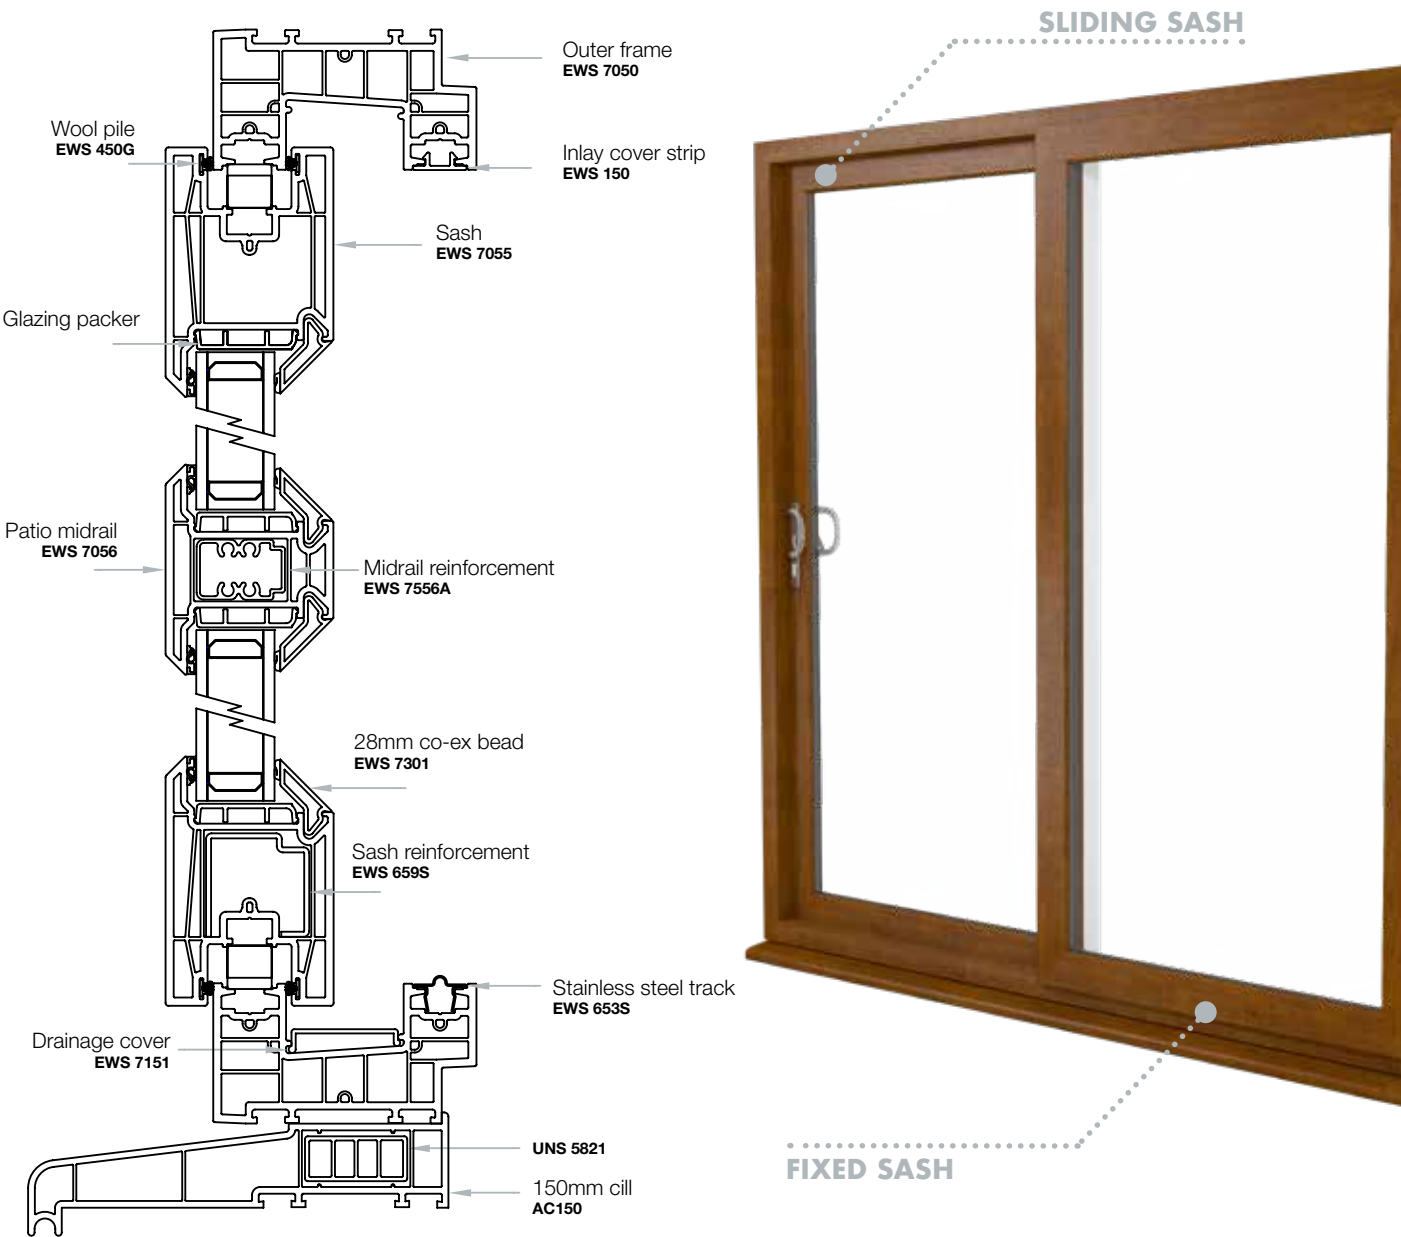

VERTICAL CROSS SECTION THROUGH FIXED SASH

Technical information

Low threshold

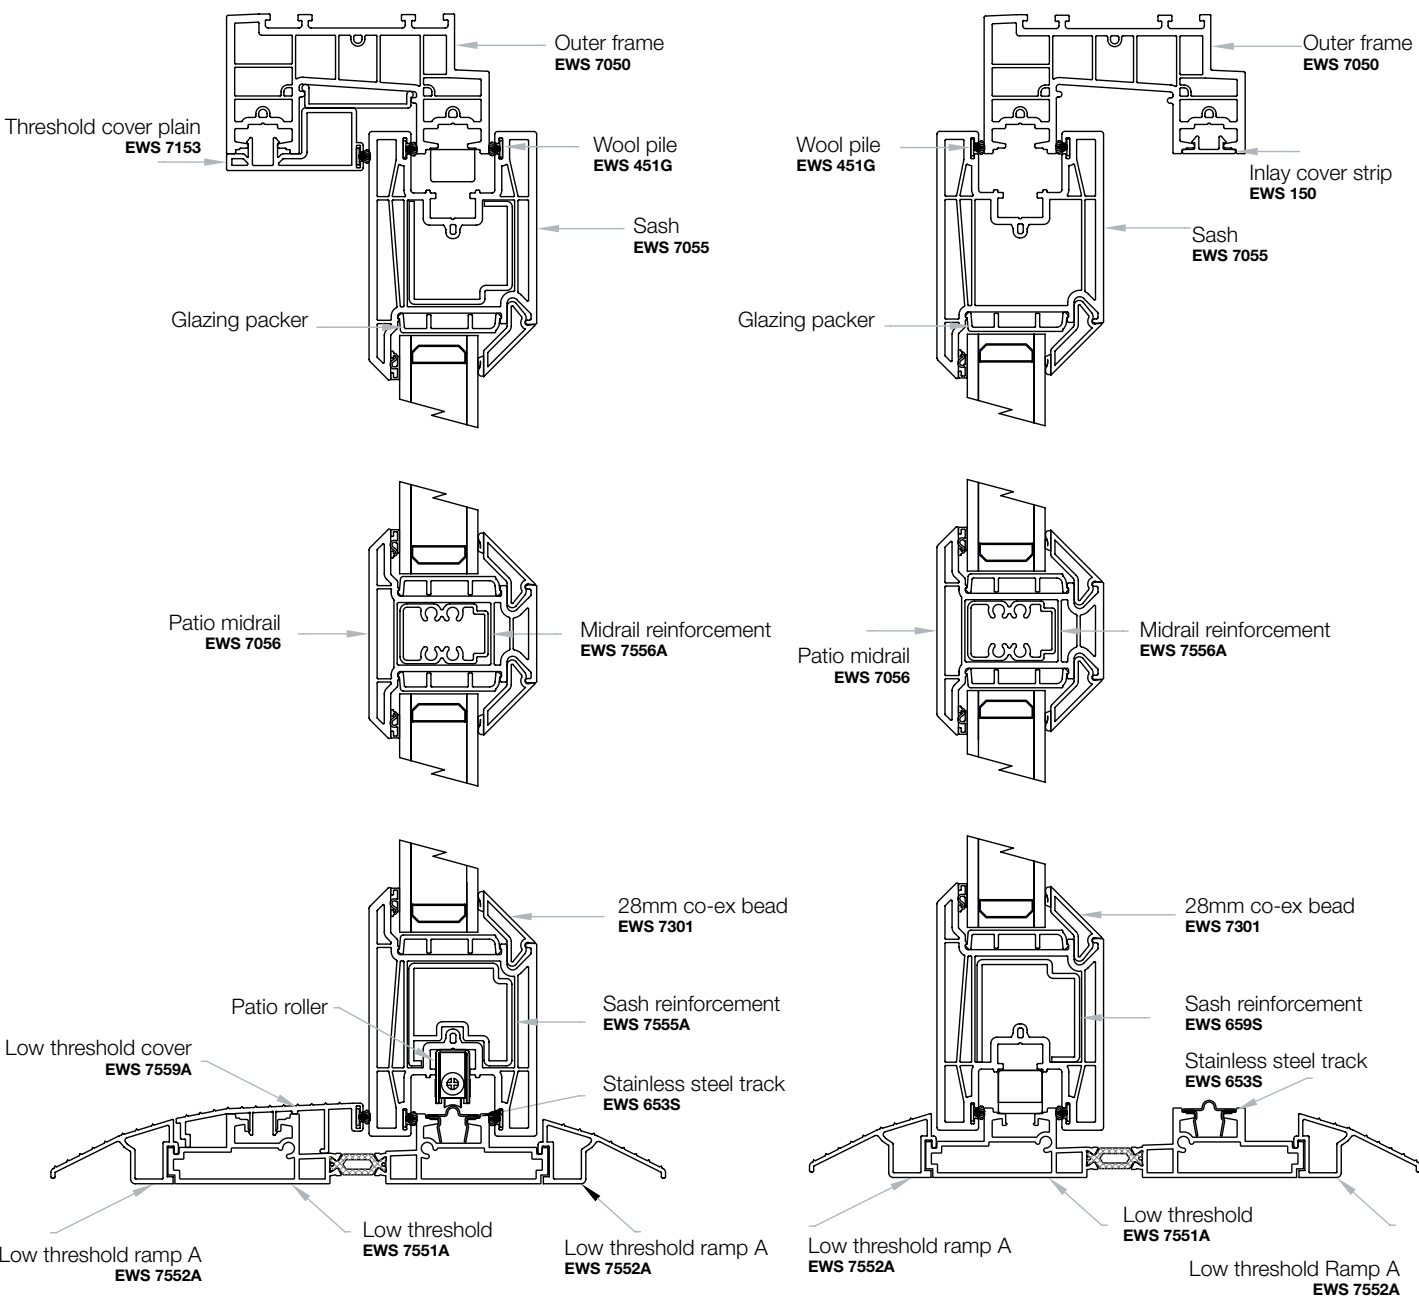


VERTICAL CROSS SECTION THROUGH SLIDING SASH WITH LOW THRESHOLD

VERTICAL CROSS SECTION THROUGH FIXED SASH WITH LOW THRESHOLD




Technical information

Components




The Ultimate


Eurocell Sliding Door

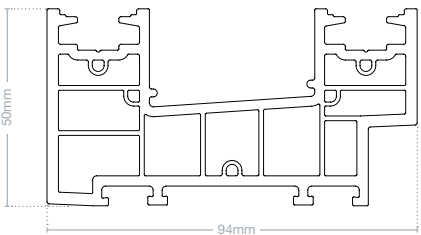


Outer frame
EWS 7050




Sash
EWS 7055

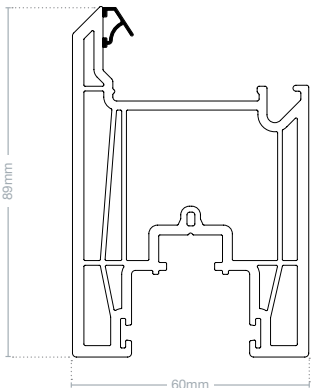


Midrail
EWS 7056

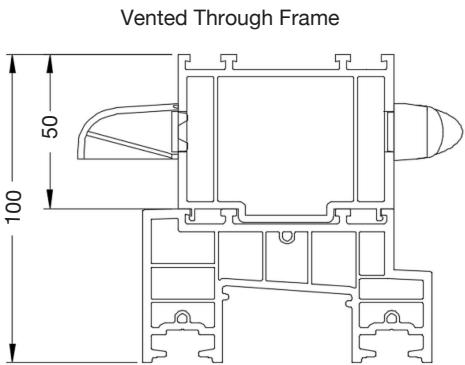


Vented Through Frame

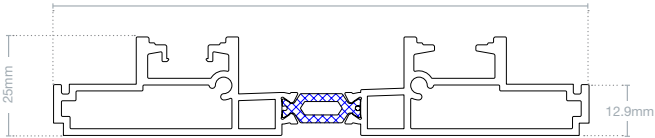

Low threshold
EWS 7551A



Low threshold Ramp A
EWS 7552A



Threshold cover
EWS 7559A



Low threshold ramp B
EWS 7558A

13.6mm

Available in 2, 3, or 4 pane configuration

28mm double & 36mm triple glazing options

U-values as low as 1.1Wm²/K triple glazed & 1.3Wm²/K double glazed

PAS24 and Part Q approved options

Thermally broken low threshold option

New end stop for improved aesthetics

Additional webs & pips for improved hardware screw retention

Optional slimline handle with cup

2 pane Max width: 3500mm Max height: 2455mm

3 pane Max width: 5000mm Max height: 2455mm

4 pane Max width: 5930 Max height: 2455mm

10-year guarantee





High precision manufacture

We employ the strictest quality management system, going far beyond our BSI approved controls.

